



TWIN TURBO

REFRIGERANT RECOVERY MACHINE

Taking the reliability of the 69000 series machines, Mastercool has enhanced those features to allow for maximum recovery capacity while at the same time decreasing size and weight. The design of the new double piston compressor and cooling by the largest fan and condenser in the market makes the new 69300 series the most complete solution to your recovery needs!

The 69360 unit offers an oil separation module, filter dryer and sight glass.




Features & Benefits:

- Revolutionary double piston oil-less compressor
- Safety high pressure switch
- Simple internal structure for field service
- Largest volume recovery rate in market
- For use with all refrigerants including R410A
- Injection molded high density polyethylene case for maximum durability
- Front cover has bumper guards built in to reduce damage to the control knobs


Specifications:

- 1/2 HP Oil Less Compressor
- Recovery Rate:
 - Direct vapor up to .526 lb/min
 - Direct liquid up to 4.75 lb/min
 - Push pull up to 11.68 lb/min
- Operating Temperature: 32 to 122°F
- Weight: 28.3 lbs
- Dimensions: 18" (l) x 10" (w) x 14" (h)
- Case Material is HDPE (High Density Polyethylene)
- Compatible Refrigerants: All CFC, HCFC, and HFC's

Liquid Recovery (ln) lb/min
• Temperature: 79 to 82°F / Refrigerant: R134a

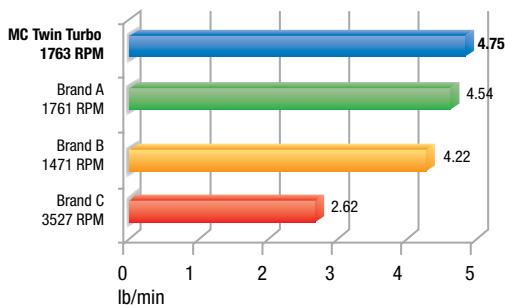

Vapor Recovery (ln) lb/min
• Temperature: 79 to 82°F / Refrigerant: R134a

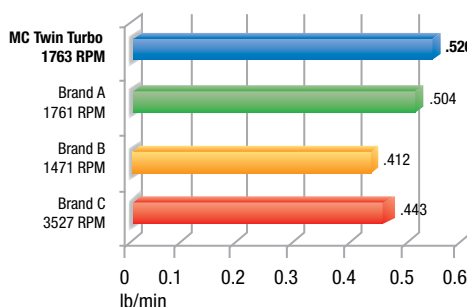

Push Pull lb/min
• Temperature: 79 to 82°F / Refrigerant: R134a

